

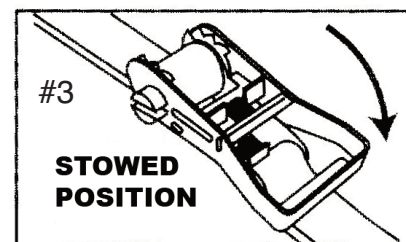


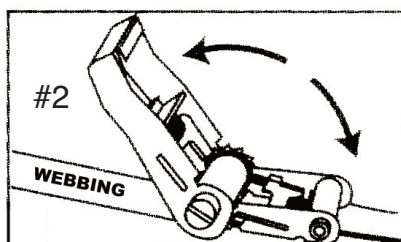



## RATCHET STRAPS

### INSTRUCTIONS FOR PROPER USE

**To Secure:** Place webbing over load and attach hooks to solid anchor points. Insert webbing through ratchet reel (see #1) and pull until ALL slack is removed. Pump ratchet handle (see #2) and wind a minimum 2 layers of webbing around reel to secure. **CAUTION:** Too many layers of webbing will jam ratchet. After load is secured, move handle down flat in the stowed position (see #3) for transit.

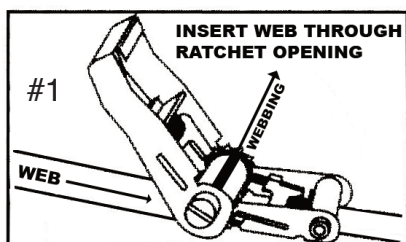

**To Release:** Pull and compress release bar (see #4) and move ratchet handle 180 degrees to the open position (see #5). Create enough slack to detach hooks, and pull webbing out of ratchet reel.

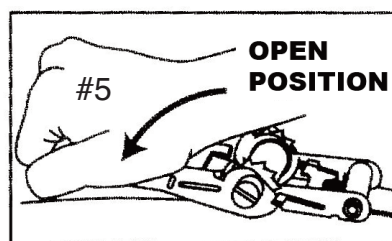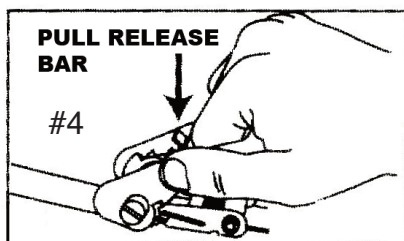

We warrant to the original purchaser of this product to be free from defects in material and workmanship under normal use and service. Our obligation under this warranty shall be limited to the repair or exchange of any part or parts which may thus prove defective under normal use and service within thirty (30) days from date of purchase by the original purchaser, and which our examination shall disclose, to our satisfaction, to be thus defective.